

MODEL


DGO 3600

	m ³ /h	3600	
RATED CAPACITY	l/min	60000	
	SCFM	2118	
Power supply	V/ph/Hz	400/3/50	
Power consumption	kW	4,650	
Full Load consumption	kW	4,70	
Rated absorpt.	A	9,28	
Full Load Current	A	9,36	
Lock. Rotor Current	A	101,00	
COP	w/w	3,55	
Weight	kg / lbs	400/882	
Air connection	IN / OUT	DN125	
Coolant type		R407C	
Volume of the gas	kg	6.0	
Inlet air temp.	°C / °F	35/95	max 70/158
Ambient temp.	°C / °F	25/77	max 50/122
Pressure dew point	°C / °F	3/37	
Working pressure	bar / psi	7/100	max 14/203

Standard features

Control panel	Electronic system type
Condenser cooling	Air cooled
Ventilator motor	Suction fan
Air/air heat exch.	Aluminium pack
Evaporator	Aluminium pack
Expansion method	Capillary tube
Separator type	Demister type
Compressor type	Scroll compressor type
Installation location	Indoor
Drain discharge	Time solenoid valve
Electric protection	IP 42

Performances & specification: +/- 5%

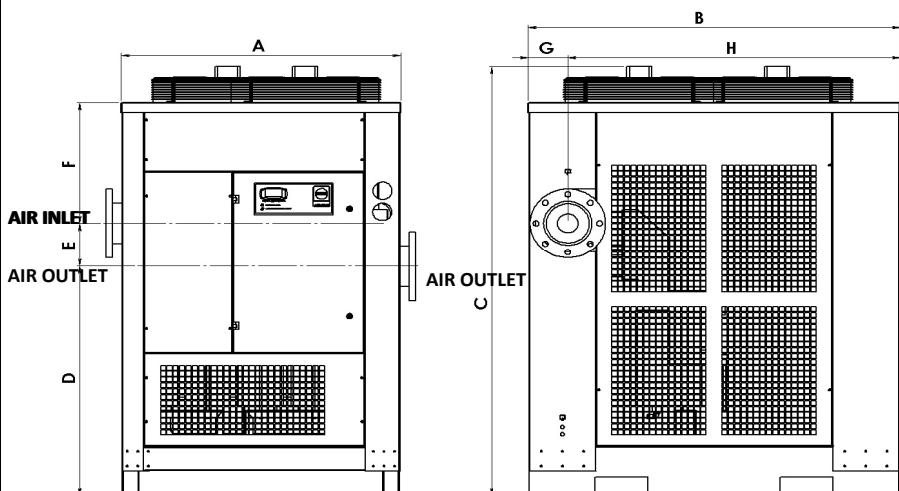

Dimensions		
A	mm	1056
B	mm	1406
C	mm	1765
D	mm	940
E	mm	178
F	mm	498
G	mm	150
H	mm	1256