

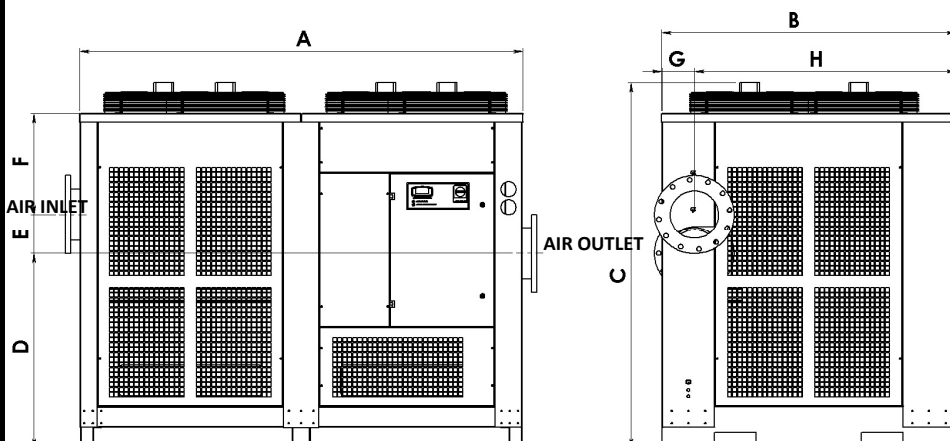
MODEL
DGO 12000

RATED CAPACITY	m ³ /h	12000	
	l/min	200000	
	SCFM	7063	
Power supply	V/ph/Hz	400/3/50	
Power consumption	kW	17,850	
Full Load consumption	kW	18,15	
Rated absorpt.	A	32,23	
Full Load Current	A	32,48	
Lock. Rotor Current	A	272,00	
COP	w/w	3,60	
Weight	kg / lbs	780/1720	
Air connection	IN / OUT	DN250	
Coolant type		R407C	
Volume of the gas	kg	16.0	
Inlet air temp.	°C / °F	35/95	max 70/158
Ambient temp.	°C / °F	25/77	max 50/122
Pressure dew point	°C / °F	3/37	
Working pressure	bar / psi	7/100	max 14/203

Standard features

Control panel	Electronic system type
Condenser cooling	Air cooled
Ventilator motor	Suction fan
Air/air heat exch.	Aluminium pack
Evaporator	Aluminium pack
Expansion method	Capillary tube
Separator type	Demister type
Compressor type	Scroll compressor type
Installation location	Indoor
Drain discharge	Time solenoid valve
Electric protection	IP 42

Performances & specification: +/- 5%


Dimensions

A	mm	2113
B	mm	1406
C	mm	1765
D	mm	740
E	mm	400
F	mm	496
G	mm	158
H	mm	1248