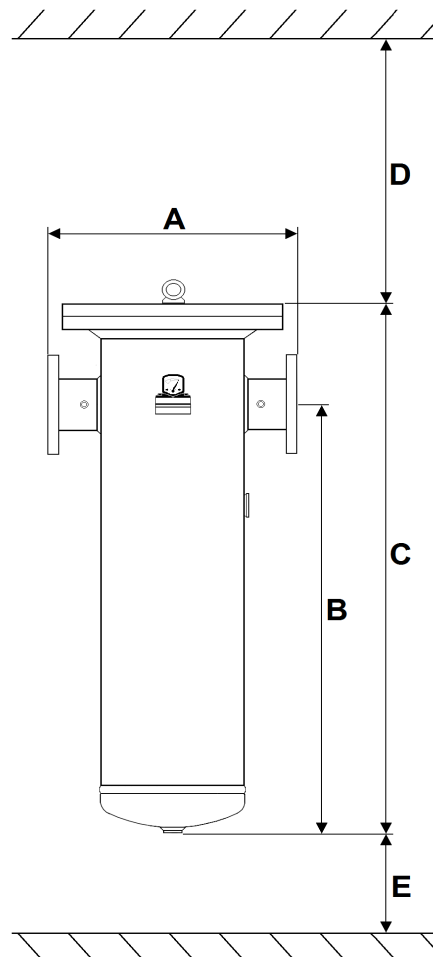


MODEL
FGO 4350

RATED CAPACITY	CAPACITA' NOMINALE	m ³ /h	4350
		l/min	72500
		CFM	2558
Working pressure	Pressione Operativa	bar	7 (Max pressure 16 barg)
Air connection	Attacchi Aria	IN / OUT	DN 125
Drain connection	Attacco Drenaggio		1"

	Type	Q.ty	Max dim. µm	Process	Max Temp °C	Pressure drop
						bar
Cartridge Cartucce	P	2 x FGO.02176.E.P0.00.00	3	interception	100	0,08
	M	2 x FGO.02176.E.M0.00.00	1	interception coalescing	100	0,15
	H	2 x FGO.02176.E.H0.00.00	0,01	interception coalescing	100	0,15
	C	2 x FGO.02176.E.C0.00.00	-	activated carbon	60	0,08

Dimensions Dimensioni	A	mm	520
	B	mm	952
	C	mm	1170
	D	mm	800
	E	mm	250
Weight Peso		kg	80


Accessories
Manual drain
Automatic drain
Thermodinamical drain
Differential gauge
Accessori
Scaricatore Manuale
Scaricatore Automatico
Scaricatore Termodinamico
Manometro Differenziale