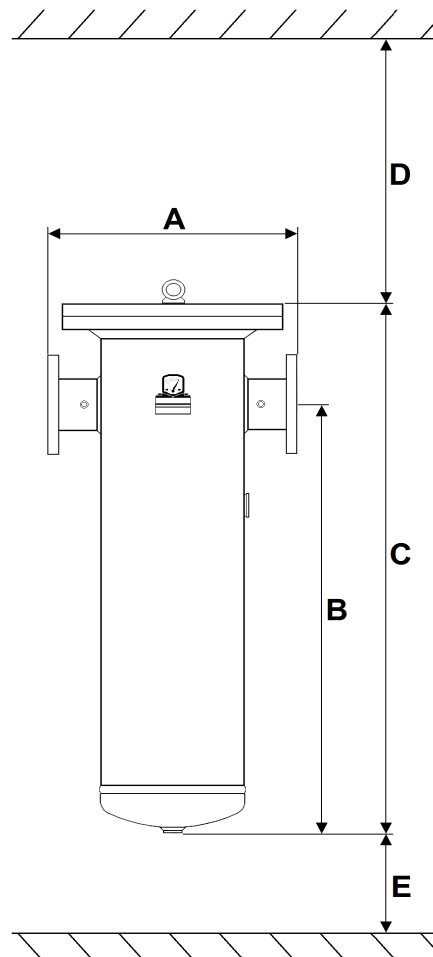


**MODEL**
**FGO 5600**

<b>RATED CAPACITY</b>	<b>CAPACITA' NOMINALE</b>	m <sup>3</sup> /h	5600
		l/min	93333
		CFM	3293
<b>Working pressure</b>	<b>Pressione Operativa</b>	bar	7 (Max pressure 16 barg)
<b>Air connection</b>	<b>Attacchi Aria</b>	IN / OUT	DN 125
<b>Drain connection</b>	<b>Attacco Drenaggio</b>		1"

	Type	Q.ty	Max dim.	Process	Max Temp	Pressure drop
			µm		°C	bar
Cartridge Cartucce	<b>P</b>	2 x FGO.02805.E.P0.00.00	3	interception	100	0,08
	<b>M</b>	2 x FGO.02805.E.M0.00.00	1	interception coalescing	100	0,15
	<b>H</b>	2 x FGO.02805.E.H0.00.00	0,01	interception coalescing	100	0,15
	<b>C</b>	2 x FGO.02805.E.C0.00.00	-	activated carbon	60	0,08

Dimensions Dimensioni	A	mm	520
	B	mm	952
	C	mm	1170
	D	mm	800
	E	mm	250
Weight Peso		kg	80


**Accessories**
*Manual drain*
*Automatic drain*
*Thermodinamical drain*
*Differential gauge*
**Accessori**
*Scaricatore Manuale*
*Scaricatore Automatico*
*Scaricatore Termodinamico*
*Manometro Differenziale*